



25.76V

SSBA2



Nominal Capacity	173 Ah
Energy(kWh)	4.46 kWh
Dimension(No Counterweight) (L*W*H/mm)	498*195*384
Weight (KG)	55
Standard IP Grade	IP65
Display Screen	1 inch display
Bluetooth	Standard Configuration
4G module	Optional
Internal Extinguisher	Optional
Continuous Discharge	173A
Max. Discharge (@30S)	519A
Max. Charging	87A
Discharging (°C)	-30°C~60°C
Self-discharge rate (one month)	≤3.5%
Certification	CE,UN38.3

25.76V

SSBA4



Nominal Capacity	228 Ah
Energy(kWh)	5.87 kWh
Dimension(No Counterweight) (L*W*H/mm)	560*192*440
Weight (KG)	66
Standard IP Grade	IP65
Display Screen	1 inch display
Bluetooth	Standard Configuration
4G module	Optional
Internal Extinguisher	Optional
Continuous Discharge	228A
Max. Discharge (@30S)	684A
Max. Charging	114A
Discharging (°C)	-30°C~60°C
Self-discharge rate (one month)	≤3.5%
Certification	CE,UN38.3

25.76V

SSBA3



Nominal Capacity	200Ah
Energy(kWh)	5.15 kWh
Dimension(No Counterweight) (L*W*H/mm)	525*223*440
Weight (KG)	57
Standard IP Grade	IP65
Display Screen	1 inch display
Bluetooth	Standard Configuration
4G module	Optional
Internal Extinguisher	Optional
Continuous Discharge	200A
Max. Discharge (@30S)	600A
Max. Charging	100A
Discharging (°C)	-30°C~60°C
Self-discharge rate (one month)	≤3.5%
Certification	CE,UN38.3

25.76V

SSBA5



Nominal Capacity	268 Ah
Energy(kWh)	6.90 kWh
Dimension(No Counterweight) (L*W*H/mm)	560*225*480
Weight (KG)	68
Standard IP Grade	IP65
Display Screen	1 inch display
Bluetooth	Standard Configuration
4G module	Optional
Internal Extinguisher	Optional
Continuous Discharge	268A
Max. Discharge (@30S)	804A
Max. Charging	134A
Discharging (°C)	-30°C~60°C
Self-discharge rate (one month)	≤3.5%
Certification	CE,UN38.3

25.76V


SSBA6



Nominal Capacity	302 Ah
Energy(kWh)	7.78 kWh
Dimension(No Counterweight) (L*W*H/mm)	525*195*580
Weight (KG)	80
Standard IP Grade	IP65
Display Screen	1 inch display
Bluetooth	Standard Configuration
4G module	Optional
Internal Extinguisher	Optional
Continuous Discharge	302A
Max. Discharge (@30S)	906A
Max. Charging	151A
Discharging (°C)	-30°C~60°C
Self-discharge rate (one month)	≤3.5%
Certification	CE,UN38.3

51.52V

SSBC1

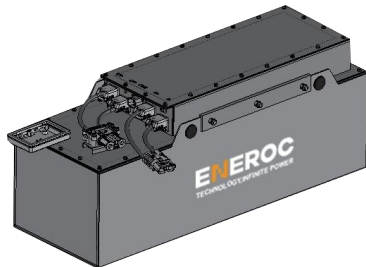

Nominal Capacity	268 Ah
Energy(kWh)	13.81 kWh
Dimension(No Counterweight) (L*W*H/mm)	936*336*372
Weight (KG)	120
Standard IP Grade	IP67
Display Screen	5 inches touching screen
Bluetooth	Standard Configuration
4G module	Optional
Internal Extinguisher	Optional
Continuous Discharge	268A
Max. Discharge (@30S)	804A
Max. Charging	134A
Discharging (°C)	-30°C~60°C
Self-discharge rate (one month)	≤3.5%
Certification	CE,UN38.3

25.76V


SSBA7



Nominal Capacity	456 Ah
Energy(kWh)	11.75 kWh
Dimension(No Counterweight) (L*W*H/mm)	600*192*680
Weight (KG)	110
Standard IP Grade	IP65
Display Screen	1 inch display
Bluetooth	Standard Configuration
4G module	Optional
Internal Extinguisher	Optional
Continuous Discharge	456A
Max. Discharge (@30S)	1000A
Max. Charging	228A
Discharging (°C)	-30°C~60°C
Self-discharge rate (one month)	≤3.5%
Certification	CE,UN38.3

51.52V

SSBC2



Nominal Capacity	302 Ah
Energy(kWh)	15.56 kWh
Dimension(No Counterweight) (L*W*H/mm)	800*275*575
Weight (KG)	155
Standard IP Grade	IP67
Display Screen	5 inches touching screen
Bluetooth	Standard Configuration
4G module	Optional
Internal Extinguisher	Optional
Continuous Discharge	302A
Max. Discharge (@30S)	906A
Max. Charging	151A
Discharging (°C)	-30°C~60°C
Self-discharge rate (one month)	≤3.5%
Certification	CE,UN38.3

51.52V


SSBC3



Nominal Capacity	346 Ah
Energy(kWh)	17.83 kWh
Dimension(No Counterweight) (L*W*H/mm)	846*346*570
Weight (KG)	173
Standard IP Grade	IP67
Display Screen	5 inches touching screen
Bluetooth	Standard Configuration
4G module	Optional
Internal Extinguisher	Optional
Continuous Discharge	346A
Max. Discharge (@30S)	1000A
Max. Charging	173A
Discharging (°C)	-30°C~60°C
Self-discharge rate (one month)	≤3.5%
Certification	CE,UN38.3

51.52V


SSBC4



Nominal Capacity	400 Ah
Energy(kWh)	20.61 kWh
Dimension(No Counterweight) (L*W*H/mm)	771*500*378
Weight (KG)	175
Standard IP Grade	IP67
Display Screen	5 inches touching screen
Bluetooth	Standard Configuration
4G module	Optional
Internal Extinguisher	Optional
Continuous Discharge	400A
Max. Discharge (@30S)	1000A
Max. Charging	200A
Discharging (°C)	-30°C~60°C
Self-discharge rate (one month)	≤3.5%
Certification	CE,UN38.3

51.52V


SSBC7



Nominal Capacity	600 Ah
Energy(kWh)	30.91 kWh
Dimension(No Counterweight) (L*W*H/mm)	793*505*585
Weight (KG)	264
Standard IP Grade	IP67
Display Screen	5 inches touching screen
Bluetooth	Standard Configuration
4G module	Optional
Internal Extinguisher	Optional
Continuous Discharge	500A
Max. Discharge (@30S)	1000A
Max. Charging	302A
Discharging (°C)	-30°C~60°C
Self-discharge rate (one month)	≤3.5%
Certification	CE,UN38.3

51.52V


SSBC8



Nominal Capacity	684 Ah
Energy(kWh)	35.65 kWh
Dimension(No Counterweight) (L*W*H/mm)	793*585*585
Weight (KG)	300
Standard IP Grade	IP67
Display Screen	5 inches touching screen
Bluetooth	Standard Configuration
4G module	Optional
Internal Extinguisher	Optional
Continuous Discharge	500A
Max. Discharge (@30S)	1000A
Max. Charging	346A
Discharging (°C)	-30°C~60°C
Self-discharge rate (one month)	≤3.5%
Certification	CE,UN38.3

80.5V


SSBD4



Nominal Capacity	400Ah
Energy(kWh)	32.20 kWh
Dimension(No Counterweight) (L*W*H/mm)	850*505*575
Weight (KG)	307
Standard IP Grade	IP67
Display Screen	5 inches touching screen
Bluetooth	Standard Configuration
4G module	Optional
Internal Extinguisher	Optional
Continuous Discharge	400A
Max. Discharge (@30S)	1000A
Max. Charging	200A
Discharging (°C)	-30°C~60°C
Self-discharge rate (one month)	≤3.5%
Certification	CE,UN38.3

80.5V

SSBD5



Nominal Capacity	456Ah
Energy(kWh)	36.71 kWh
Dimension(No Counterweight) (L*W*H/mm)	905*550*585
Weight (KG)	335
Standard IP Grade	IP67
Display Screen	5 inches touching screen
Bluetooth	Standard Configuration
4G module	Optional
Internal Extinguisher	Optional
Continuous Discharge	456A
Max. Discharge (@30S)	1000A
Max. Charging	228A
Discharging (°C)	-30°C~60°C
Self-discharge rate (one month)	≤3.5%
Certification	CE,UN38.3

51.52V


SSBC5



Nominal Capacity	456 Ah
Energy(kWh)	23.49 kWh
Dimension(No Counterweight) (L*W*H/mm)	780*455*560
Weight (KG)	230
Standard IP Grade	IP67
Display Screen	5 inches touching screen
Bluetooth	Standard Configuration
4G module	Optional
Internal Extinguisher	Optional
Continuous Discharge	456A
Max. Discharge (@30S)	1000A
Max. Charging	228A
Discharging (°C)	-30°C~60°C
Self-discharge rate (one month)	≤3.5%
Certification	CE,UN38.3

51.52V

SSBC6



Nominal Capacity	536 Ah
Energy(kWh)	27.61 kWh
Dimension(No Counterweight) (L*W*H/mm)	693*495*574
Weight (KG)	233
Standard IP Grade	IP67
Display Screen	5 inches touching screen
Bluetooth	Standard Configuration
4G module	Optional
Internal Extinguisher	Optional
Continuous Discharge	500A
Max. Discharge (@30S)	1000A
Max. Charging	268A
Discharging (°C)	-30°C~60°C
Self-discharge rate (one month)	≤3.5%
Certification	CE,UN38.3

51.52


SSBC9



Nominal Capacity	804 Ah
Energy(kWh)	41.42 kWh
Dimension(No Counterweight) (L*W*H/mm)	900*525*575
Weight (KG)	330
Standard IP Grade	IP67
Display Screen	5 inches touching screen
Bluetooth	Standard Configuration
4G module	Optional
Internal Extinguisher	Optional
Continuous Discharge	500A
Max. Discharge (@30S)	1000A
Max. Charging	400A
Discharging (°C)	-30°C~60°C
Self-discharge rate (one month)	≤3.5%
Certification	CE,UN38.3

77.28V

SSBD1



Nominal Capacity	268Ah
Energy(kWh)	20.71 kWh
Dimension(No Counterweight) (L*W*H/mm)	1015*290*575
Weight (KG)	233
Standard IP Grade	IP67
Display Screen	5 inches touching screen
Bluetooth	Standard Configuration
4G module	Optional
Internal Extinguisher	Optional
Continuous Discharge	268A
Max. Discharge (@30S)	804A
Max. Charging	134A
Discharging (°C)	-30°C~60°C
Self-discharge rate (one month)	≤3.5%
Certification	CE,UN38.3

80.5V

SSBD6



Nominal Capacity	536Ah
Energy(kWh)	43.15 kWh
Dimension(No Counterweight) (L*W*H/mm)	865*590*575
Weight (KG)	367
Standard IP Grade	IP67
Display Screen	5 inches touching screen
Bluetooth	Standard Configuration
4G module	Optional
Internal Extinguisher	Optional
Continuous Discharge	500A
Max. Discharge (@30S)	1000A
Max. Charging	268A
Discharging (°C)	-30°C~60°C
Self-discharge rate (one month)	≤3.5%
Certification	CE,UN38.3

80.5V

SSBD7



Nominal Capacity	604Ah
Energy(kWh)	48.62 kWh
Dimension(No Counterweight) (L*W*H/mm)	970*590*575
Weight (KG)	425
Standard IP Grade	IP67
Display Screen	5 inches touching screen
Bluetooth	Standard Configuration
4G module	Optional
Internal Extinguisher	Optional
Continuous Discharge	500A
Max. Discharge (@30S)	1000A
Max. Charging	302A
Discharging (°C)	-30°C~60°C
Self-discharge rate (one month)	≤3.5%
Certification	CE,UN38.3